

## Research Article

# Treatment of Textile Industry Wastewaters with Sonication

Sponza DT\* and Oztekin R

Department of Environmental Engineering, Dokuz Eylül University, Turkey

\*Corresponding author: Delia Teresa Sponza, Department of Environmental Engineering, Dokuz Eylül University, Turkey

Received: April 25, 2020; Accepted: May 19, 2020;

Published: May 26, 2020

## Abstract

In this study, the effects of ambient conditions (25°C), increasing sonication time (60, 120 and 150 min), sonication temperature (30°C and 60°C), on the sonication of wastewater from textile industry wastewater (TI ww) treatment plant in Izmir, Turkey was investigated in a sonicator with a power of 640 W, a frequency of 35 kHz and a sonication time of 150 min for the treatments of Methylene Blue (MB) and Rhodamine B (RhB) dyestuffs. Dissolved chemical oxygen demand ( $COD_{dis}$ ), color and three polyphenols [4-methyl phenol ( $C_7H_8O$ ) (4-MP), 4-hydroxyanisole ( $C_7H_8O_2$ ) (4-H), 2-methyl-4-hydroxyanisole ( $C_8H_{10}O_2$ ) (2-M-4-H)] removal efficiencies were observed during sonication experiments. 99.37%  $COD_{dis}$ , 98.07% color, 96% total phenol (PHE R), 93% 4-MP, 88% 4-H and 85% 2-M-4-H maximum removal efficiencies were found after 150 min sonication time and at 60°C.

**Keywords:** Methylene Blue; Polyphenols; Rhodamine B; Sonication; Textile industry wastewater

## Introduction

The textile industries use enormous amount of  $H_2O$  and chemicals for the wet processing of textiles and also use various types of dyes to impart attractive colors of commercial importance. The wastewater let out by the textile industries generally contain about 10% of dyes used for the textile coloration [13]. These dye stuff include various types like acidic, basic, azo, reactive, anthroquinone-based compounds and among these azo dyes are widely used by the industries. Further, azo dyes contribute about 60–70% of the total dyestuff produced [14].

The application of ultrasound as an alternative to the removal of dyes in waters has become of increasing interest in recent years [24,43]. This technique is considered as an Advanced Oxidation Process (AOP) that generates hydroxyl radicals ( $OH^\bullet$ ) through acoustic cavitation, which can be defined as the cyclic formation, growth and collapse of microbubbles. Fast collapse of bubbles compresses adiabatically entrapped gas and vapours which leads to short and local hot spots [6]. In the final stage of the collapse, the temperature inside the residual bubble or in the surrounding liquid is thought to be above 5000°C. The  $OH^\bullet$  and hydroperoxyl radicals ( $O_2H^\bullet$ ) can be generated from  $H_2O$  and  $O_2$  [20]. The sonochemical activity arises mainly from acoustic cavitation in liquid media. The acoustic cavitation occurring near a solid surface will generate microjets which will facilitate the liquid to move with a higher velocity resulting in increased diffusion of solute inside the pores of the TI ww [16,17]. In the case of sonication, localized temperature raise and swelling effects due to ultrasound may also improve the diffusion. The stable cavitation bubbles oscillate which is responsible for the enhanced molecular motion and stirring effect of ultrasound. In case of cotton dyeing TI ww, the effects produced due to stable cavitation may be realized at the interface of fabric and colored solution. Mass transport intensification using a conventional approach such as very high elevated temperatures ( $> 500^\circ C$ ), is not always feasible, due to

undesired side-effects such as fabric damage. About 87% and 81%  $COD_{dis}$  yields was achieved using 40 and 50 min ultrasounds while compared to only 48% and 28.9%  $COD_{dis}$  removals in the absence of ultrasound in TI ww at 25°C [44].

The influence of bicarbonate ( $HCO_3^-$ ) and carbonate ( $CO_3^{2-}$ ) ions on sonolytic degradation of cationic dye, Rhodamine B (RhB), in water was investigated [22]. As a consequence of ultrasonic cavitation that generates  $OH^\bullet$ , carbonate radicals ( $\bullet CO_3$ ) were secondary products of water sonochemistry when it contains dissolved  $HCO_3^-$  or  $CO_3^{2-}$ . The results clearly demonstrated the significant intensification of sonolytic destruction of RhB in the presence of  $HCO_3^-$  and  $CO_3^{2-}$ , especially at lower dye concentrations. Degradation intensification occurs because  $\bullet CO_3$  sonochemically formed undergo radical-radical recombination at a lesser extent than  $OH^\bullet$ . The generated  $\bullet CO_3$  are likely able to migrate far from the cavitation bubbles towards the solution bulk and are suitable for the degradation of RhB [22]. Therefore, at low dye concentrations,  $\bullet CO_3$  presents a more selective reactivity towards RhB molecules than  $OH^\bullet$ . In the presence of  $HCO_3^-$ , degradation rate reached a maximum at  $3 \text{ g L}^{-1} HCO_3^-$ , but subsequent addition retards the destruction process. In RhB solutions containing  $CO_3^{2-}$ , the oxidation rate gradually increased with increasing  $CO_3^{2-}$  concentration up to  $10 \text{ g L}^{-1}$  and slightly decreased afterward.  $\bullet CO_3$  sonochemically generated are suitable for total removal of COD of sonicated RhB solutions [22].

In a study performed by Entezari and Sharif Al-Hoseini [12] 98% color removal was accomplished in a TI ww containing  $50 \text{ mg L}^{-1} MB$ , at 20 kHz frequency, at 120 W power, after 30 min sonication time at 30°C with 700 rpm agitation. In this study, 78.26% color removal was observed after 150 min sonication time at 30°C at not agitated conditions. The color yield in the present study is lower than the yield obtained by Entezari and Sharif Al-Hoseini [12] at 30°C as mentioned above. This could be attributed to the differentiations in dyes present

**Table 1:** Characterization values of TI ww (n=3, mean values  $\pm$  SD).

Parameters	Values		
	Minimum	Medium	Maximum
pH	5 $\pm$ 0.18	5.27 $\pm$ 0.19	6 $\pm$ 0.21
DO (mg L <sup>-1</sup> )	1.30 $\pm$ 0.05	1.40 $\pm$ 0.05	1.50 $\pm$ 0.05
ORP (mV)	85 $\pm$ 2.98	106 $\pm$ 3.71	128 $\pm$ 4.48
TSS (mg L <sup>-1</sup> )	285 $\pm$ 9.98	356 $\pm$ 12.46	430 $\pm$ 15.05
TVSS (mg L <sup>-1</sup> )	192 $\pm$ 6.72	240 $\pm$ 8.40	290 $\pm$ 10.15
CODtotal (mg L <sup>-1</sup> )	931.70 $\pm$ 32.61	1164.60 $\pm$ 40.76	1409.20 $\pm$ 49.32
CODdissolved (mg L <sup>-1</sup> )	770.40 $\pm$ 26.96	962.99 $\pm$ 33.71	1165.22 $\pm$ 40.78
TOC (mg L <sup>-1</sup> )	462.40 $\pm$ 16.18	578 $\pm$ 20.23	700 $\pm$ 24.50
BOD5 (mg L <sup>-1</sup> )	251.50 $\pm$ 8.80	314.36 $\pm$ 11	380.38 $\pm$ 13.31
BOD <sub>5</sub> /COD <sub>dis</sub>	0.26 $\pm$ 0.01	0.33 $\pm$ 0.012	0.40 $\pm$ 0.014
Total N (mg L <sup>-1</sup> )	24.80 $\pm$ 0.87	31 $\pm$ 1.09	37.51 $\pm$ 1.31
NH <sub>4</sub> -N (mg L <sup>-1</sup> )	1.76 $\pm$ 0.06	2.20 $\pm$ 0.08	2.66 $\pm$ 0.09
NO <sub>3</sub> -N (mg L <sup>-1</sup> )	8 $\pm$ 0.28	10 $\pm$ 0.35	12.10 $\pm$ 0.42
NO <sub>2</sub> -N (mg L <sup>-1</sup> )	0.13 $\pm$ 0.05	0.16 $\pm$ 0.06	0.19 $\pm$ 0.07
Total P (mg L <sup>-1</sup> )	8.80 $\pm$ 0.31	11 $\pm$ 0.39	13.30 $\pm$ 0.47
PO <sub>4</sub> -P (mg L <sup>-1</sup> )	6.40 $\pm$ 0.22	8 $\pm$ 0.28	9.68 $\pm$ 0.34
Total phenol (mg L <sup>-1</sup> )	29.60 $\pm$ 1.04	37 $\pm$ 1.30	44.80 $\pm$ 1.57
SO <sub>4</sub> -2 (mg L <sup>-1</sup> )	1248 $\pm$ 43.70	1560 $\pm$ 54.60	1888 $\pm$ 66.10
Color (m <sup>-1</sup> )	70.90 $\pm$ 2.48	88.56 $\pm$ 3.10	107.20 $\pm$ 3.75
TAAAs (mg benzidine L <sup>-1</sup> )	1296 $\pm$ 45.36	1620 $\pm$ 56.70	1960 $\pm$ 68.60

in TI ww to the operational conditions such as sonication duration, sonication frequency and to not stirred conditions of sonicated wastewater. Banerjee et al. [3] has been investigated the sonochemical decolorization of wastewater containing a basic dye, Rhodamine 6G (Rh 6G) and the effect of initial concentration, pH and use of different additives, such as CCl<sub>4</sub>, H<sub>2</sub>O<sub>2</sub>, air and UV light in combination with ultrasound on the extent of decolorization. 77.8% maximum Rh 6G decolorization was observed for the use of H<sub>2</sub>O<sub>2</sub> with sonication.

In the present study, the effects of ambient conditions (25°C), increasing sonication time (60, 120 and 150 min), sonication temperature (30°C and 60°C) on the sonication of wastewater from textile industry wastewater (TI ww) treatment plant in Izmir, Turkey was investigated in a sonicator with a power of 640 W, a frequency of 35 kHz and a sonication time of 150 min for the treatments of MB and RhB dyestuffs. COD<sub>dis</sub>, color and three polyphenols [4-methyl phenol (C<sub>7</sub>H<sub>8</sub>O) (4-MP), 4-hydroxyanisole (C<sub>7</sub>H<sub>8</sub>O<sub>2</sub>) (4-H), 2-methyl-4-hydroxyanisole (C<sub>8</sub>H<sub>10</sub>O<sub>2</sub>) (2-M-4-H)] removal efficiencies were observed during sonication experiments. 99.37% COD<sub>dis</sub>, 98.07% color, 96% total phenol (PHE R), 93% 4-MP, 88% 4-H and 85% 2-M-4-H maximum removal efficiencies were found after 150 min sonication time and at 60°C.

## Materials and Methods

### Raw wastewater

The TI ww used in this study contains color (> 70.9 m<sup>-1</sup>), total phenol (> 37 mg L<sup>-1</sup>), COD<sub>dis</sub> (> 770 mg L<sup>-1</sup>) and high biological oxygen demand 5-days (BOD<sub>5</sub>) (> 251 mg L<sup>-1</sup>) concentrations with a

BOD<sub>5</sub>/COD<sub>dis</sub> ratio of 0.33. The characterization of TI ww was shown in Table 1 for minimum, medium and maximum values.


### Configuration of sonicator

A Bandelin Electronic RK510 H sonicator was used for sonication of the TI ww samples. The sonication frequency and the sonication power were 35 kHz and 640 W, respectively. Glass serum bottles in a glass reactor were filled to a volume of 100 mL with raw TI ww and they were closed with teflon coated closers for the measurement of volatile compounds (evaporation) of the raw TI ww. The evaporation losses of volatile compounds were estimated to be 0.01% in the reactor and, therefore, assumed to be negligible. The serum bottles were filled with 0.1 mL methanol in order to prevent adsorption on the walls of the bottles and minimize evaporation. 25°C, 30°C and 60°C temperatures were adjusted electronically in the sonicator with two thermostatic heaters. The stainless steel sonicator was equipped with a teflon holder to prevent temperature losses. The schematic configuration of the sonicator used in this study is shown in Figure 1.

### Operational conditions

The effects of ambient conditions (25°C), increasing sonication time (60, 120 and 150 min), sonication temperature (30°C and 60°C) on the sonication of wastewater from textile industry wastewater (TI ww) treatment plant in Izmir, Turkey was investigated. Through 5 min before ultrasound was begun at pH=5.4. Sonicated samples were taken at 60<sup>th</sup>, 120<sup>th</sup> and 150<sup>th</sup> min of sonication time and were kept in a refrigerator with a temperature of +4°C for experimental analysis. Deionized pure H<sub>2</sub>O (R ¼ 18 MΩ cm<sup>-1</sup>) was obtained through a SESA Ultrapure water system.

All experiments were in batch mode by using an ultrasonic transducer (horn-type), which has five adjustable active acoustical vibration areas of 12.43, 13.84, 17.34, 26.4 and 40.69 cm<sup>2</sup>, with diameters 3.98, 4.41, 4.7, 5.8 and 7.2 cm, with input ultrasound powers of 120, 350, 640, 3000 and 5000 W, with ultrasound frequencies of 25, 35, 132, 170 and 350 kHz, with US intensities of 15.7, 24.2, 36.9, 46.2 and 51.4 W cm<sup>-2</sup>, with power densities of 0.1, 0.9, 1.65, 1.9, 2.14 W mL<sup>-1</sup>, with specific energies of 2.4, 3.1, 4.1, 5.1, 11.5 kWh kg<sup>-1</sup> COD<sub>influent</sub><sup>-1</sup>, respectively, were chosen to identify for maximum removal of pollutant parameters (COD<sub>dis</sub>, color, total phenol and polyphenols) in the TI ww at the bottom of the reactor through a piezoelectric disc (4-cm diameter) fixed on a pyrex plate (5-cm diameter) (Table 2).

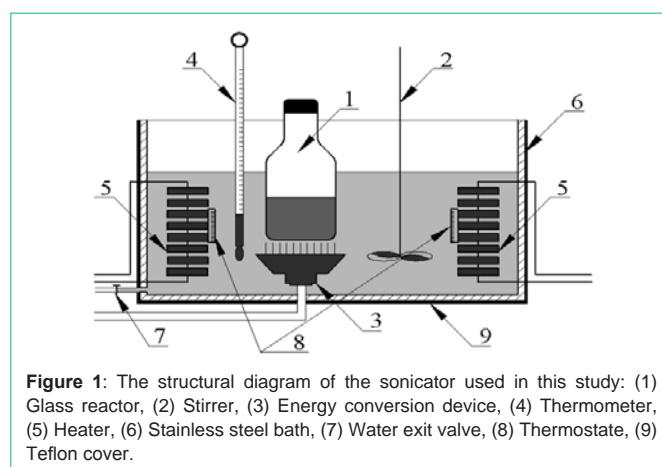

**Figure 1:** The structural diagram of the sonicator used in this study: (1) Glass reactor, (2) Stirrer, (3) Energy conversion device, (4) Thermometer, (5) Heater, (6) Stainless steel bath, (7) Water exit valve, (8) Thermostate, (9) Teflon cover.

Samples were taken after 120th and 150th min of ultrasound time and they were analyzed immediately.

Reagent grade perfluorohexane ( $C_6F_{14}$ ) was taken from Fluka (Germany). Aniline (99%), 2-PHE (99%), 3-PHE (99%), 2, 4, 6 trimetylaniline (99%), dimethylaniline (99%) and o-toluidine (99%) was purchased from Aldrich (USA).

### Analytical methods

pH, temperature [T(°C)], oxidation reduction potential [ORP (mV)], Total Suspended Solids (TSS), Total Volatile Suspended Solids (TVSS), Dissolved Oxygen (DO), Biological Oxygen Demand 5-days ( $BOD_5$ ), total Chemical Oxygen Demand ( $COD_{total}$ ), Dissolved Oxygen Demand ( $COD_{dis}$ ), Total Organic Carbon (TOC), oil were monitored following Standard Methods 2550, 2580, 2540 C, 2540 E, 5210 B, 5220 D, 5310, 5520 B, respectively [10]. Total nitrogen (Total-N), ammonium nitrogen ( $NH_4$ -N), nitrate nitrogen ( $NO_3$ -N), nitrite nitrogen ( $NO_2$ -N), total phosphorus (Total-P), phosphate phosphorus ( $PO_4$ -P), total phenol and sulfate ion ( $SO_4^{2-}$ ) were measured with cell test spectroquant kits (Merck, Germany) at a spectroquant NOVA 60 (Merck, Germany) spectrophotometer (2003). The characterization of TI ww was shown in Table 1 for minimum, medium and maximum values.

The measurement of color was carried out following the approaches described by Olthof and Eckenfelder [23] and Eckenfelder [11]. According these methods, the color content was determined by measuring the absorbance at three wavelengths (445, 540 and 660 nm), and taking the sum of the absorbances at these wavelengths.

In order to identify the TAAs, TI ww (25 mL) was acidified at pH=2.0 with a few drops of 6 N hydrochloric acid (HCl) and extracted three times with 25 mL of ethyl acetate. The pooled organic phases were dehydrated on sodium sulphate, filtered and dried under vacuum. The residue was silylated with bis (trimethylsilyl) trifluoroacetamide (BSTFA) in dimethylformamide and analyzed by GC-MS. Mass spectra were recorded using a VGTS 250 spectrometer equipped with a capillary SE 52 column (0.25 mm ID, 25 m) at 220°C with an isothermal program for 10 min. TAAs were measured using retention times and mass spectra analysis. Polyphenols measurement was performed following the Standard Methods 5520 B (Eaton et al., 2005) with a gas chromatography-mass spectrometry (GC-MS) (Hewlett-Packard 6980/HP5973MSD). Mass spectra were recorded using a VGTS 250 spectrometer equipped with a capillary SE 52 column (0.25 mm ID, 25 m) at 220°C with an isothermal program for 10 min. The total phenol was monitored as follows: 40 mL of TI ww was acidified to pH=2.0 by the addition of concentrated HCl. Phenols were then extracted with ethyl acetate. The organic phase was concentrated at 40°C to about 1 mL and silylized by the addition of N,O-Bis(trimethylsilyl)Acetamide (BSA). The resulting trimethylsilyl derivatives were analysed by GC-MS (Hewlett-Packard 6980/HP5973MSD).

### Statistical analysis

Analysis of Variance (ANOVA) of experimental data was performed to determine the F and P values, i.e. the ANOVA test was used to test the differences between dependent and independent groups [48]. Comparison between the actual variation in experimental data averages and standard deviation was expressed in terms of F

**Table 2:** Sonicational parameters and corresponding values of sonication process in this study at pH=5.4 after 150 min sonication time for maximum  $COD_{dis}$  yields under ambient conditions (at 25°C), at initial  $COD_{dis}$  concentration=962.99 mg  $L^{-1}$ , at sonication power=640 W and at sonication frequency=35 kHz (n=3, mean values).

Ultrasound parameters	Values				
	25	35	132	170	350
Ultrasound frequency (kHz)	25	35	132	170	350
Ultrasound power (W)	120	640	350	3000	5000
Power density ( $W mL^{-1}$ )	0.1	2.14	0.9	1.65	1.9
Ultrasound intensity ( $W cm^{-2}$ )	15.7	51.4	24.2	36.9	46.2
Specific energy ( $kWh kg^{-1} COD_{influent-1}$ )	2.4	11.5	3.1	4.1	5.1
Active acoustical vibration area ( $cm^2$ )	12.43	40.69	13.84	17.34	26.4
Reactor diameters (cm)	3.98	7.2	4.41	4.7	5.8
$COD$ removal efficiency (%)	45	61	47	53	58

ratio. F was equal to 'found variation of the data averages/expected variation of the data averages'. P reports the significance level. Regression analysis was applied to the experimental data to determine the regression coefficient (R2) [38].

All experiments were carried out three times and the results given as the means of triplicate samplings. Individual TI ww concentrations are given as the mean with Standard Deviation (SD) values.

## Results and Discussion

### Effect of sonication frequency and power on the degradation of TI ww

The effect of the ultrasonic frequency on the degradation ratio of  $COD_{dis}$  was also considered in the range from 35 kHz to 150 kHz. Increasing the sonication frequency did not increase the number of free radicals, therefore, a low number of free radicals did not escape from the bubbles and did not migrate as reported by David [8]. The optimum time to reach equilibrium and the faster rate of removal in the presence of ultrasound was attributed to the higher mass transfer and higher surface area produced by the cavitation process [30]. The phenomenon responsible for removal of  $COD_{dis}$  is the formation of  $OH\cdot$  during sonication of aqueous solution by the cavitation process. This process consists of the formation, growth and collapse by violent implosions to release extreme temperatures and pressures at local hot spots in the liquid (Suslick, 1986). 61% maximum  $COD_{dis}$  removal was observed after 150 min sonication time, at 25°C, at 35 kHz ultrasound frequency, at 640 W sonication power, at 2.14  $W mL^{-1}$  power density, at 51.4  $W cm^{-2}$  ultrasound intensity, at 11.5  $kWh kg^{-1} COD_{influent}^{-1}$  specific energy, at 40.69  $cm^2$  active acoustical vibration area and at 7.2 cm reactor diameters, respectively. The maximum  $COD_{dis}$  removal efficiency of our other studies such as petrochemical industry wastewaters (PCI ww) and Olive Mill industry Wastewaters (OMW) was obtained at the same operational conditions at 25°C, after 150 min sonication time, at 35 kHz ultrasound frequency, at 640 W sonication power, at 2.14  $W mL^{-1}$  power density, at 51.4  $W cm^{-2}$  ultrasound intensity, at 11.5  $kWh kg^{-1} COD_{influent}^{-1}$  specific energy, at 40.69  $cm^2$  active acoustical vibration area and at 7.2 cm reactor diameters, respectively [34-39]. As the power increased, the number of collapsing cavities also increased, thus leading to enhanced degradation rates, as reported by Papadaki, et al. and Psillakis, et al. [25,27].

**Table 3:** COD<sub>dis</sub> removal efficiencies of TI ww before and after sonication at initial COD<sub>dis</sub> concentrations=962,99 mg L<sup>-1</sup>, at sonication power=640 W and at sonication frequency=35 kHz (n=3, mean values).

Time (min)	COD <sub>dis</sub> Removal Efficiencies (%)		
	25°C, control	30°C	60°C
0. min	0	0	0
60. min	30.43	42.39	48.08
120. min	53.69	67.34	68.48
150. min	74.27	81.53	84.92

**Table 4:** Color removal efficiencies of TI ww before and after sonication at initial color concentrations=88.56 m<sup>-1</sup>, at sonication power=640 W and at sonication frequency=35 kHz (n=3, mean values).

Time (min)	Color Removal Efficiencies (%)		
	25°C, control	30°C	60°C
0. min	0	0	0
60. min	12.37	52.29	79.32
120. min	53.47	76.38	83.2
150. min	57.09	78.26	87.66


### Effect of increasing sonication time on the COD<sub>dis</sub>, color and polyphenols removal efficiencies in ambient conditions (25°C)

TI ww samples were treated with sonicator at different sonication times (60, 120 and 150 min) at 25°C ambient conditions (Figure 2a; Table 3, SET 1). 30.43%, 53.69% and 74.27% COD<sub>dis</sub> removals were observed at 60, 120 and 150 min sonication time, respectively, at pH=7.0 and at 25°C (Figure 2a; Table 3, SET 1). The maximum COD<sub>dis</sub> removals was 74.27% after 150 min sonication time, at pH=7.0 and at 25°C. As the sonication time was increased the COD<sub>dis</sub> removal efficiency in TI ww was enhanced. A significant linear correlation between COD<sub>dis</sub> yields and sonication time was observed (R<sup>2</sup>=0.74, F=11.90, p=0.01) (Figure 2a; Table 3, SET 1). The optimum time to reach equilibrium and the faster rate of removal in the presence of ultrasound was attributed to the higher mass transfer and higher surface area produced by the cavitation process (Sivakumar and Pandit, 2001). The phenomenon responsible for removals of COD<sub>dis</sub> is the formation of OH<sup>•</sup> during sonication of aqueous solution by the cavitation process (Suslick, 1986). This process consists of the formation, growth and collapse by violent implosions to release extreme temperatures and pressures at local hot spots in the liquid (Suslick, 1986). Under these critical conditions, the entrapped molecules of H<sub>2</sub>O in the bubble dissociate into very reactive OH<sup>•</sup> and hydrogen radicals (H<sup>•</sup>) [12].

8 70% COD removal found in a TI ww containing 20 mg L<sup>-1</sup> C.I. Reactive Blue 19, at 20 kHz, at 176 W, at 176 W L<sup>-1</sup>, after 30 min sonication time, at 30°C and at pH=8.0. In this study, 74.27% COD<sub>dis</sub> removal was observed after 150 min sonication time and at 25°C. The COD<sub>dis</sub> yield in the present study is higher than the yield obtained by He et al. [18] at 30°C and at a pH of 8.0. Behnajady et al. (2008a) 67% COD<sub>dis</sub> removal was achieved in a TI ww containing 10 mg L<sup>-1</sup> RhB concentration at an initial COD<sub>dis</sub> concentration of 12 mg L<sup>-1</sup> at 35 kHz frequency, at 170 W power and at a power density of 0.163 W/ml after 180 min sonication time at 25°C. In this study, 74.27% COD<sub>dis</sub> removal was observed after 150 min sonication time at 25°C.

The COD<sub>dis</sub> yield found in the present study is higher than the yield obtained by Behnajady, et al. [4] at 25°C. This could be attributed to the differences between sonication power and sonication frequency applied to the TI wws. Yachmenev et al. [46] found 88.00% COD removal in a TI ww containing 20.00 mg/l Reactive Blue 9, at 20 kHz frequency, after 60 min sonication time at 25°C and at pH=8.0. In this study, 74.27% COD<sub>dis</sub> removal was observed after 150 min sonication time at 25°C. The COD<sub>dis</sub> yield found in this study is lower than the yield obtained by Yachmenev et al. [49] at 25°C.

12.37%, 53.47% and 57.09% color removals were found after 60, 120 and 150 min sonication time, respectively, at pH=7.0 and at 25°C (Figure 2b; Table 4, SET 1). The maximum color removal efficiency was 57.09% after 150 min sonication time, at pH=7.0 and at 25°C. A significant linear correlation between color yields and sonication time was obtained (R<sup>2</sup>=0.83, F=10.92, p=0.01) (Figure 2b; Table 4, SET 1). The main reaction pathway for TI ww containing azo dye solutions is the oxidation by OH<sup>•</sup> attack in the bulk liquid via sonication in (Equation 1), while thermal reactions may occur at the bubble-liquid interface for some dye molecules to approach gaseous bubble surfaces as reported by Ince and Tezcanli-Guyur [19] in (Equation 2):



MB and RhB dyestuffs were selected for our study. It is expected that the sonolytic degradation of MB and RhB dyestuffs would mainly occur by OH<sup>•</sup> attack [41,42]. In order to investigate the dependence of the OH<sup>•</sup> during the degradation of MB and RhB dyestuffs by ultrasonic irradiation, the sonolytic degradation of MB and RhB in the presence of radical scavengers (such as H<sup>•</sup>, OH<sup>•</sup>, O<sub>2</sub>H<sup>•</sup>, O<sub>2</sub><sup>•</sup>), known as an effective OH<sup>•</sup> scavenger, was performed and was to scavenge OH<sup>•</sup> in the bubble and prevent the accumulation of OH<sup>•</sup> at the interface of the bubble (Tauber et al., 1999a, b). After the decolorization, the process could shift progressively from the bulk solution to the surface of the catalysts and cleavage of the carbon (C), hydrogen (H<sub>2</sub>) and oxygen (O<sub>2</sub>) rings was mainly attributed to the radical scavengers (H<sup>•</sup>, OH<sup>•</sup>, O<sub>2</sub>H<sup>•</sup>, O<sub>2</sub><sup>•</sup>) reactions. The organic dyes (acid, basic, direct, reactive, vat, etc.) are totally mineralized to simple inorganic species such as CO<sub>3</sub><sup>-</sup>, Cl<sup>-</sup> and NO<sub>3</sub><sup>-</sup> [49]. [44] found that the ultrasonic waves can reduce the concentration of MB up to 10% in 30 min sonication time and at 30°C. In this study, 57.09% color removal was observed after 150 min sonication time and at 25°C. The color yield in the present study is higher than the yield obtained by Vankar and Shanker (2008) at 30°C. The color yields obtained in this study are lower than the decolorization efficiencies obtained by Destailats et al. [9] (80%) and Sun et al. [39] (89%) in TI wws containing 10 mg L<sup>-1</sup> Methyl Orange and 10 mg L<sup>-1</sup> Acidic Black<sup>-1</sup> at 500 kHz frequency, at 50 W power and at 2 W cm<sup>-2</sup> power intensity after 60 min sonication time at 45°C. This could be attributed to the differences in dyestuff properties, to the dyestuff concentrations in TI ww and to the some operational conditions such as sonication at high frequency. In a study performed by Singla et al. [29] 80% color removal was obtained in a TI ww containing 15 mg L<sup>-1</sup> Martius Yellow dye at 355 kHz frequency, at 30 W power, at power densities varying between 0.049 and 1.16 W L<sup>-1</sup>, after 240 min sonication time at 25°C. In this study, 57.09% color removal was observed after 150 min sonication time at 30°C. The color yield found in this study is lower than the yield

**Table 5:** Measurements of total phenols and three polyphenols (4-methyl phenol, 4-hydroxyanisole and 2-methyl-4-hydroxyanisole) in TI ww with GC-MS after 120 and 150 min sonication time, at pH=7.0, at increasing temperatures, at initial total phenol concentration=37 mg L<sup>-1</sup>, at sonication power=640 W and at sonication frequency=35 kHz (n=3, mean values).

		25°C, control						
Time (min)	PHE0 (mg L <sup>-1</sup> )	PHE R (%)	4-MP (mg L <sup>-1</sup> )	4-MP R (%)	4-H (mg L <sup>-1</sup> )	4-H R (%)	2-M-4-H (mg L <sup>-1</sup> )	2-M-4-H R (%)
0	37	0	0	0	0	0	0	0
120	16.65	55	5.2	45	8.52	42	10.11	40
150	11.1	70	3.31	65	5.29	64	6.74	60
		30°C						
Time (min)	PHE0 (mg L <sup>-1</sup> )	PHE R (%)	4-MP (mg L <sup>-1</sup> )	4-MP R (%)	4-H (mg L <sup>-1</sup> )	4-H R (%)	2-M-4-H (mg L <sup>-1</sup> )	2-M-4-H R (%)
0	37	0	0	0	0	0	0	0
120	15.17	59	5	50	8.4	48	9.78	46
150	8.14	78	2.5	75	4.85	70	6.34	65
		60°C						
Time (min)	PHE0 (mg L <sup>-1</sup> )	PHE R (%)	4-MP (mg L <sup>-1</sup> )	4-MP R (%)	4-H (mg L <sup>-1</sup> )	4-H R (%)	2-M-4-H (mg L <sup>-1</sup> )	2-M-4-H R (%)
0	37	0	0	0	0	0	0	0
120	12.58	66	4.85	55	8.2	51	8.54	49
150	5.55	85	2.26	79	4.35	74	4.69	72

PHE0: Initial total phenol concentration (mg L<sup>-1</sup>), PHE R: Total phenol removal efficiency (%), 4-MP: 4-methyl phenol concentration after sonication (mg L<sup>-1</sup>), 4-MP R: 4-methyl phenol removal efficiency (%), 4-H: 4-hydroxyanisole concentration after sonication (mg L<sup>-1</sup>), 4-H R: 4-hydroxyanisole removal efficiency (%), 2-M-4-H: 2-methyl-4-hydroxyanisole concentration after sonication (mg L<sup>-1</sup>), 2-M-4-H R: 2-methyl-4-hydroxyanisole removal efficiency (%).

obtained by Singla et al. [29] at 30°C. This could be attributed to the low ambient temperature and to the high frequency used throughout sonication and to the high dye concentrations.

Total phenol (PHE R) and three polyphenols [4-methyl phenol (C<sub>7</sub>H<sub>8</sub>O) (4-MP), 4-hydroxyanisole (C<sub>7</sub>H<sub>8</sub>O<sub>2</sub>) (4-H), 2-methyl-4-hydroxyanisole (C<sub>8</sub>H<sub>10</sub>O<sub>2</sub>) (2-M-4-H)] were measured in TI ww during sonication process after 120 and 150 min sonication time. 55% PHE R, 45% 4-MP, 42% 4-H and 40% 2-M-4-H polyphenols removals were measured after 120 min sonication time, respectively, at pH=7.0 and at 25°C (Table 5). 70% PHE R, 65% 4-MP, 64% 4-H and 60% 2-M-4-H polyphenols removals were observed after 150 min sonication time, respectively, at pH=7.0 and at 25°C. The maximum polyphenols removals were 70% PHE R, 65% 4-MP, 64% 4-H and 60% 2-M-4-H after 150 min sonication time, respectively, at pH=7.0 and at 25°C. A significant linear correlation between polyphenols removals and sonication time was observed (R<sup>2</sup>=0.88, F=15.64, p=0.01) (Table 5). Pyrolytic destruction of the polyphenols in the gas phase is negligible; the degradation occurs mainly in the bulk solution. A possible explanation for this is that a considerable increase in the concentration results in the formation of a complex H-bonding network between the polyphenolic compounds [45]. During sonication low decrease of total phenol concentrations in the effluent samples results in the formation of a complex H-bonding network between the polyphenolic compounds after 60 min sonication time. It is well known that molecules containing COOH or CHO groups exist as dimers in solution due to the formation of H-bonds between two neighboring molecules. This results in a more robust and stable configuration, thus leading to reduced degradation [7]. In addition to this, the formation of such a network may impede their diffusion towards the bubble interface and this would also lead to reduced degradation of polyphenols [2].


**Table 6:** Measurements of total phenols and three polyphenols (4-methyl phenol, 4-hydroxyanisole and 2-methyl-4-hydroxyanisole) in TI ww with GC-MS after 120 and 150 min sonication time, at pH=7.0, at increasing temperatures (25, 30 and 60°C), at initial total phenol concentration=37 mg L<sup>-1</sup>, at sonication power=640 W and at sonication frequency=35 kHz (n=3, mean values).

T (°C)	Polyphenols Names	Polyphenols Removal Efficiencies (%)	
		120 min	150 min
25	PHE R	59	73
	4-MP R	48	68
	4-H R	44	66
	2-M-4-H R	41	61
30	PHE R	64	83
	4-MP R	54	79
	4-H R	51	73
	2-M-4-H R	48	67
60	PHE R	72	91
	4-MP R	60	84
	4-H R	55	78
	2-M-4-H R	52	75

PHE R: Total phenol removal efficiency (%), 4-MP R: 4-methyl phenol removal efficiency (%), 4-H R: 4-hydroxyanisole removal efficiency (%), 2-M-4-H R: 2-methyl-4-hydroxyanisole removal efficiency (%).

#### Effect of increasing temperature on the removal of COD<sub>dis</sub>, color and polyphenols versus sonication time

42.39%, 67.34% and 81.53% COD<sub>dis</sub> removals were observed after 60, 120 and 150 min sonication time, respectively, at pH=7.0 and at 30°C (Figure 2a; Table 3, SET 2). 11.96%, 13.65% and 7.26%

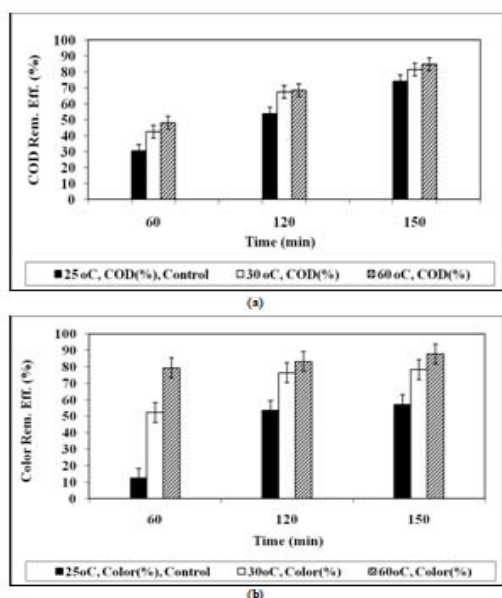

**Figure 2:** Effect of increasing temperature on the a)  $COD_{dis}$  and b) Color removal efficiencies in TI ww versus increasing sonication times (sonication power=640 W, sonication frequency=35 kHz, initial  $COD_{dis}$  concentration=962.99 mg L<sup>-1</sup>, initial color concentration=88.56 m<sup>-1</sup>, n=3, mean values).

increase in  $COD_{dis}$  removals were obtained after 60, 120 and 150 min sonication time, respectively, at pH=7.0 and at 30°C, compared to the control (E=74.27%  $COD_{dis}$  after 150 min sonication time at pH=7.0 and at 25°C). A significant linear correlation between  $COD_{dis}$  yields and temperature was not observed ( $R^2=0.33$ ,  $F=2.88$ ,  $p=0.01$ ) (Figure 2a; Table 3, SET 2). 48.08%, 68.48% and 84.92%  $COD_{dis}$  yields were found after 120 and 150 min sonication time, respectively, at pH=7.0 and at 60°C (Figure 2a; Table 3, SET 2). The contribution of temperature on  $COD_{dis}$  removals were 17.65%, 10.79% and 10.65% after 60, 120 and 150 min sonication time, respectively, at pH=7.0 and at 60°C, compared to the control (E=74.27%  $COD_{dis}$  after 150 min sonication time, at pH=7.0 and at 25°C). The maximum  $COD_{dis}$  removal was 84.92% after 150 min sonication time at pH=7.0 and at 60°C. A significant linear correlation between  $COD_{dis}$  yields and temperature was observed ( $R^2=0.71$ ,  $F=13.92$ ,  $p=0.01$ ) (Figure 2a; Table 3, SET 2). The optimum time to reach equilibrium and the faster rate of removal in the presence of ultrasound was attributed to the higher mass transfer and higher surface area produced by the cavitation process [30]. The phenomenon responsible for removals of  $COD_{dis}$  is the formation of  $OH^\cdot$  during sonication of aqueous solution by the cavitation process. This process consists of the formation, growth and collapse by violent implosions to release extreme temperatures and pressures at local hot spots in the liquid [39]. Under these critical conditions, the entrapped molecules of  $H_2O$  in the bubble dissociate into very reactive  $OH^\cdot$  and  $H^\cdot$  [12]. With an increase in the temperature, the initial sono-degradation rate was increased in TI ww [22]. This could be explained by the hydrophilic property of the pollutant which is mostly degraded outside the cavitation process by the  $OH^\cdot$  produced by ultrasound in TI ww [22]. Therefore, reactions in the bulk are facilitated by increasing the temperature due to the higher mass transfer of different species at


higher temperatures and this leads to an enhancement of the reaction rate of radicals with  $COD$  molecule [15]. On the other hand, any increase in temperature will raise the vapor pressure of a medium and so lead to easier cavitation [4,5].

In a study performed by Arslan et al. [1] 80%  $COD$  removal was achieved at 30 kHz frequency, at 640 W power, 22 W m<sup>-2</sup> power intensity after 80 min sonication time at 30°C in TI ww. In this study, 81.53%  $COD_{dis}$  removal was observed after 150 min sonication time at 30°C. The  $COD_{dis}$  yield found in the present study is higher than the yield obtained by Arslan et al. [1] at 30°C as mentioned above. Yavuz et al. (2009) accomplished 98.30%  $COD$  removal in a TI ww containing 20 mg L<sup>-1</sup> Basic Red 29 at 40 kHz frequency, at 25 W power and at 0.25 W mL<sup>-1</sup> power density after 30 min sonication time at 40°C. In this study, 84.92%  $COD_{dis}$  removal was observed after 150 min sonication time at 60°C. The  $COD_{dis}$  yield in the present study is lower than the yield obtained by Yavuz et al. [47] at 40°C as mentioned above. This could be attributed to the differentiations in the organic content of the TI ww studied.

52.29%, 76.38% and 78.26% color removals were observed after 60, 120 and 150 min sonication time, respectively, at pH=7.0 and at 30°C (Figure 2b; Table 4, SET 2). 39.92%, 22.91% and 21.17% increase in the color removals were obtained after 60, 120 and 150 min sonication time, respectively, at pH=7.0 and at 30°C, compared to the control (E=12.37%, E=53.47% and E=57.09% color after 120 and 150 min sonication time, respectively, at pH=7.0 and at 25°C). A significant linear correlation between color yields and temperature was not observed ( $R^2=0.46$ ,  $F=4.51$ ,  $p=0.01$ ) (Figure 2b; Table 4, SET 2). 79.32%, 83.20% and 87.66% color yields were found after 60, 120 and 150 min sonication time, respectively, at pH=7.0 and at 60°C (Figure 2b; Table 4, SET 2). The contribution of temperatures on color removals were 66.95%, 29.73% and 30.57% after 60, 120 and 150 min sonication time, respectively, at pH=7.0 and at 60°C, compared to the control (E=12.37%, E=53.47% and E=57.09% color after 120 and 150 min sonication time, respectively, at pH=7.0 and at 25°C). The maximum color removal was 87.66% after 150 min sonication time at pH=7.0 and at 60°C. A significant linear correlation between color yields and temperature was not observed ( $R^2=0.51$ ,  $F=3.09$ ,  $p=0.01$ ) (Figure 2b; Table 4, SET 2). [28] reported 80.62% color removal in a TI ww containing 1000 mg L<sup>-1</sup> Rifacion Yellow HE4R with ultrasound and combined ultrasound/activated carbon at 850 kHz, at 140 W, after 120 min sonication time and at 30°C. In this study, 78.26% color removal was observed after 150 min sonication time and at 30°C. In this study, similar yields were observed with the yields obtained by Sayan [28] at 30°C as mentioned above. [44] found that the ultrasonic waves can reduce the concentration of MB up to 10% in 30 min sonication time at 30°C. In this study, 78.26% color removal was observed after 150 min sonication time at 30°C. The color yield in the present study is higher than the yield obtained by Vankar and Shanker [47] at 30°C. In a study performed by Entezari and Sharif Al-Hoseini [12] 98% color removal was accomplished in a TI ww containing 50 mg L<sup>-1</sup> MB, at 20 kHz frequency, at 120 W power, after 30 min sonication time at 30°C with 700 rpm agitation. In this study, 78.26% color removal was observed after 150 min sonication time at 30°C at not agitated conditions. The color yield in the present study is lower than the yield obtained by Entezari and Sharif Al-Hoseini [12] at 30°C as mentioned above. This could be attributed to

the differentiations in dyes present in TI to the operational conditions such as sonication duration, sonication frequency and to non stirred conditions of sonicated wastewater.

78% PHE R, 75% 4-MP, 70% 4-H and 65% 2-M-4-H polyphenols removals were observed after 150 min sonication time, respectively, at pH=7.0 and at 30°C (Table 5). 8% PHE R, 10% 4-MP, 6% 4-H and 5% 2-M-4-H increase in polyphenols removals were obtained after 150 min sonication time, respectively, at pH=7.0 and at 30°C, compared to the control (E=70% PHE R, E=65% 4-MP, E=64% 4-H, E=60% 2-M-4-H polyphenols after 150 min sonication time, at pH=6.98 and at 25°C). A significant linear correlation between polyphenols yields and temperature was observed ( $R^2=0.83$ ,  $F=13.95$ ,  $p=0.01$ ) (Table 5). 85% PHE R, 79% 4-MP, 74% 4-H and 72% 2-M-4-H polyphenols yields were found after 150 min sonication time, respectively, at pH=7.0 and at 60°C (Table 5). The contribution of temperatures on polyphenols removals were 15%, 14%, 10% and 12% for PHE R, 4-MP, 4-H and 2-M-4-H, respectively, after 150 min sonication time, respectively, at pH=7.0 and at 60°C, compared to the control (E=70% PHE R, E=65% 4-MP, E=64% 4-H, E=60% 2-M-4-H polyphenols after 150 min sonication time, at pH=6.98 and at 25°C). The maximum polyphenols removals were 85% PHE R, 79% 4-MP, 74% 4-H and 72% 2-M-4-H after 150 min sonication time, respectively, at pH=7.0 and at 60°C. A significant linear correlation between polyphenols removals and temperature was obtained ( $R^2=0.87$ ,  $F=14.70$ ,  $p=0.01$ ) (Table 5). The degradation of phenol occurs in the bulk liquid medium due to hydroxylation reaction induced by  $\text{OH}^\bullet$  generated from cavitation bubble [23]. This is a consequence of low vapor pressure of phenol (due to which it does not evaporate into the cavitation bubble) and the hydrophilic nature of the phenol molecule. The interaction between radicals and phenol molecules becomes an important factor influencing the overall degradation. The scavenging phenomenon increases the sonodegradation of phenol. Moreover, the concentration of the radical scavenging species is another important factor affecting the degradation. The formation of  $\text{OH}^\bullet$  and  $\text{H}_2$  derived from sonolysis of  $\text{H}_2\text{O}$  in aqueous solution saturated with  $\text{O}_2$  as an endpoint of inertial cavitation was examined. It should be pointed out that  $\text{OH}^\bullet$ , formed via  $\text{H}_2\text{O}$  sonolysis, can partly recombine yielding  $\text{H}_2\text{O}_2$  which in turn reacts with  $\text{H}_2$  to regenerate  $\text{OH}^\bullet$  in (Equation 3,4) [23]:



[40] found that ultrasound-assisted the hydroxylation of phenolic compounds, such as phenol, 4-methyl phenol, 4-hydroxyanisole, 2-naphthol, catechol, resorcinol, 3-t-butyl-4-hydroxyanisole, 3-methyl-4-hydroxyanisole, in aqueous solution in 12-18 h, at 200 kHz. In the present study, we agree with the results of Takizawa et al. (1996) in TI ww.

## Conclusions

Low frequency (35 kHz) sonication proved to be a viable tool for the effective of  $\text{COD}_{\text{dis}}$ , color, polyphenols removals in TI ww. 96.70%  $\text{COD}_{\text{dis}}$ , 95.06% color, 94% PHE R, 89% 4-MP, 83% 4-H and 80% 2-M-4-H maximum removals were observed after 150 min sonication time and at 60°C. 98.13%  $\text{COD}_{\text{dis}}$ , 96.24% color, 95% PHE R, 92% 4-MP, 85% 4-H and 81% 2-M-4-H maximum yields were obtained

after 150 min sonication time and at 60°C. 99.37%  $\text{COD}_{\text{dis}}$ , 98.07% color, 96% PHE R, 93% 4-MP, 88% 4-H and 85% 2-M-4-H maximum removals were obtained after 150 min sonication time and at 60°C. Also, increasing temperature was positively effected in TI ww at sonication time.

The sonication process could prove to be less land-intensive, less expensive and require less maintenance than traditional biological treatment processes and other AOPs. Sonication technology can provide a cost-effective alternative for destroying and detoxifying refractory compounds in TI ww.

## Acknowledgements

This research study was undertaken in the Environmental Microbiology Laboratory at Dokuz Eylül University Engineering Faculty Environmental Engineering Department, Izmir, Turkey. The authors would like to thank this body for providing financial support.

## References

- Arslan I, Balcioglu IA, Bahnemann DW. Heterogeneous photocatalytic treatment of simulated dyehouse effluents using novel  $\text{TiO}_2$ -photocatalysts, *Applied Catalyst B*. 2000; 26: 193-206.
- Atanassova D, Kefalas P, Petrakis C, Mantzavinos D, Kalogerakis N, Psillakis E. Sonochemical reduction of the antioxidant activity of olive mill wastewater. *Environment International*. 2005; 31: 281-7.
- Banerjee BS, Khode AV, Patil AP, Mohod AV, Gogate PR. Sonochemical decolorization of wastewaters containing Rhodamine 6G using ultrasonic bath at an operating capacity of 2L, *Desalination and Water Treatment*, 2013; 51: 1378-87.
- Behnajady MA, Modirshahla N, Bavili Tabrizi S, Molanee S. Ultrasonic degradation of Rhodamine B in aqueous solution: Influence of operational parameters. *Journal of Hazardous Materials*. 2008a; 152: 381-6.
- Behnajady MA, Modirshahla N, Shokri M, Vahid B. Effect of operational parameters on degradation of Malachite Green by ultrasonics irradiation *Ultrasonics Sonochemistry*. 2008b; 15: 1009-14.
- Crum LA. Comments on the evolving field of sonochemistry by a cavitation physicist *Ultrasonics Sonochemistry*. 1995; 2: 147-152.
- Currell DL, Wilhelm G, Nagy S. The effect of certain variables on the ultrasonic cleavage of phenol and of pyridine. *Journal of the American Chemical Society*. 1963; 85: 127-130.
- David B. Sonochemical degradation of PAH in aqueous solution. Part I: Monocomponent PAH solution. *Ultrasonics Sonochemistry*. 2009; 16: 260-265.
- Destaillets H, Colussi AJ, Joseph JM, Hoffmann MR. Synergistic effects of sonolysis combined with ozonolysis for the oxidation of azobenzene and Methyl Orange. *Journal of Physical Chemistry A*. 2000; 104: 8930-5.
- Eaton AD, Clesceri LS, Rice EW, Greenberg AE, Franson MAH. (21th ed.) *Standard Methods for the Examination of Water and Wastewater*. Washington, DC: American Public Health Association (APHA), American Water Works Association (AWWA), Water Environment Federation (WEF). American Public Health Association 800 I Street, NW. 2005; 20001-3770.
- Eckenfelder WW. *Industrial Water Pollution Control* (2nd ed). Signapore: McGraw-Hill Inc.1989.
- Entezari MH, Sharif Al-Hoseini Z. Sono-sorption as a new method for the removal of Methylene Blue from aqueous solution. *Ultrasonics Sonochemistry*. 2007; 14: 599-604.
- Easton J. The dye maker's view. *Color in dyehouse effluent*. In *Society of dyers and colourists*. (11) Bradford UK. 1995.
- Garcia-Montano J, Domenech X, Garcia-Hortal JA, Torrades F, Peral J. The testing of several biological and chemical coupled treatments for Cibacorn

- Red FN-R azo dye removal. *Journal of Hazardous Materials*. 2007; 154: 484-90.
15. Ghodbane H, Hamdaoui O. Intensification of sonochemical decolorization of anthraquinonic dye Acid Blue 25 using carbon tetrachloride *Ultrasonics Sonochemistry*. 2009; 16: 455-61.
16. Gogate PR, Sivakumar M, Pandit AB. Destruction of Rhodamine B using novel sonochemical reactor with capacity of 7.5 l. *Separation and Purification Technology*. 2004a; 34: 13-24.
17. Gogate PR, Mujumdar S, Thampi J, Wilhelm AM, Pandit AB. Destruction of phenol using sonochemical reactors: scale up aspects and comparison of novel configuration with conventional reactors. *Separation Purification Technology*. 2004b; 34: 25-34.
18. He Z, Lin L, Song S, Xia M, Xu L, Ying H, Chen J. Mineralization of C.I. Reactive Blue 19 by ozonation combined with sonolysis: Performance optimization and degradation mechanism. *Separation and Purification Technology*. 2008; 62: 376-381.
19. Ince NH, Tezcanli-Guyer G. Impacts of pH and molecular structure on ultrasonic degradation of azo dyes. *Ultrasonics*. 2004; 42: 591-596.
20. Mason TJ, Pétrier C. Advanced oxidation processes for water and wastewater treatment, in: Parson, S. (Ed.), *Ultrasound processes*, IWA Publishing, London. 2004; 185-208.
21. Merouani S, Hamdaoui O, Saoudi F, Chiha M, Pétrier C. Influence of bicarbonate and carbonate ions on sonochemical degradation of Rhodamine B in aqueous phase. *Journal of Hazardous Materials*. 2010; 175: 593-599.
22. Moore SB, Ausley LW. Systems thinking and green chemistry in the textile industry: concepts, technologies and benefits. *Journal of Cleaner Production*. 2004; 12: 585-601.
23. Olthof M, Eckenfelder WW. Coagulation of textile wastewater *Textile, Chemistry and Colorists*. 1976; 8: 18-22.
24. Özen AS, Aviyente V, Tezcanli-Güyer G, Ince NH. Experimental and modeling approach to decolorization of azo dyes by ultrasound. Degradation of the hydrazone tautomer. *The Journal of Physical Chemistry*. 2005; 109: 3506-3516.
25. Papadaki M, Emery RJ, Abu-Hassan MA, Diaz-Bustos A, Metcalfe IS, Mantzavinos D. Sonocatalytic oxidation processes for the removal of contaminants containing aromatic rings from aqueous effluents. *Separation and Purification Technology*. 2004; 34: 35-42.
26. Petrier C, Francony A. Ultrasonic wastewater treatment incidence of ultrasonic frequency on the rate of phenol and CCl<sub>4</sub> degradation. *Ultrasonics Sonochemistry*. 1997; 4: 295-300.
27. Psillakis E, Goula G, Kalogerakis N, Mantzavinos D. Degradation of polycyclic aromatic hydrocarbons in aqueous solutions by ultrasonic irradiation. *Journal of Hazardous Materials*. 2004; 108: 95-102.
28. Sayan E. Optimization and modeling of decolorization and COD reduction of reactive dye solutions by ultrasound-assisted adsorption. *Chemical Engineering Journal*. 2006; 119: 175-181.
29. Singla R, Grieser F, Ashokkumar M. Sonochemical degradation of Martius Yellow dye in aqueous solution. *Ultrasonics Sonochemistry*. 2009; 16: 28-34.
30. Sivakumar M, Pandit AB. Ultrasound enhanced degradation of Rhodamine optimization with power density. *Ultrasonics Sonochemistry*. 2001; 8: 233-240.
31. Sponza DT, Oztekin R. Effect of ultrasonic irradiation on the treatment of poly-aromatic substances (PAHs) from a petrochemical industry wastewater. *First International Workshop on Application of Redox Technologies in the Environment*. 2009; 109-116.
32. Sponza DT, Oztekin R. Effect of ultrasound on the treatment of petrochemical industry wastewaters, *Proceedings of National Environmental Engineering Congress*. 2011; 33: 194-210.
33. Sponza DT, Oztekin R. Effect of sonication assisted by titanium dioxide and ferrous ions on polyaromatic hydrocarbons (PAHs) and toxicity removals from a petrochemical industry wastewater in Turkey. *Journal of Chemical Technology and Biotechnology*. 2010; 85: 913-925.
34. Sponza DT, Oztekin R. Removals of PAHs and acute toxicity via sonication in a petrochemical industry wastewater. *Chemical Engineering Journal*. 2010; 162: 142-150.
35. Sponza DT, Oztekin R. Destruction of some more and less hydrophobic PAHs and their toxicities in a petrochemical industry wastewater with sonication. *Bioresource Technology*. 2010; 101: 8639-8648.
36. Sponza DT, Oztekin R. Removals of some hydrophobic poly aromatic hydrocarbons (PAHs) and *Daphnia magna* acute toxicity in a petrochemical industry wastewater with ultrasound. *Separation and Purification Technology*. 2011; 77: 301-311.
37. STATGRAPHICS Centurion XV, software, StatPoint Inc, Statgraphics Centurion XV, Herndon, VA, USA.
38. Sun JH, Sun SP, Sun JY, Sun RX, Qiao LP, Guo HQ, et al. Degradation of azo dye Acid Black 1 using low concentration iron of fenton process facilitated by ultrasonic irradiation. *Ultrasonics Sonochemistry*. 2007; 14: 761-766.
39. Suslick KS. Organometallic sonochemistry, in *advances in organometallic chemistry*. Academic Press. 1986; 316: 1-2.
40. Takizawa Y, Akama M, Yoshihara N, Nojima O, Arai K, Okouchi S. Hydroxylation of phenolic compounds under the condition of ultrasound in aqueous solution. *Ultrasonics Sonochemistry*. 1996; 3: 201-204.
41. Tauber A, Mark G, Schuchmann H, von Sonntag C. Sonolysis of tert-butyl alcohol in aqueous systems. *Ultrasonics Sonochemistry*. 1999; 9: 291-296.
42. Tauber A, Mark G, Schuchmann HP, von Sonntag C. Sonolysis of tert-butyl alcohol in aqueous solution. *Journal of Chemical Society Perkin Transactions*. 1999; 2: 1129-1135.
43. Tezcanli-Guyer G, Ince NH. Degradation and toxicity reduction of textile dyestuff by ultrasound, *Ultrasonics Sonochemistry*. 2003; 10: 235-240.
44. Vankar PS, Shanker R. Ecofriendly ultrasonic natural dyeing of cotton fabric with enzyme pretreatments. *Desalination*. 2008; 230: 62-69.
45. Vassilakis C, Pantidou A, Psillakis E, Kalogerakis N, Mantzavinos D. Sonolysis of natural phenolic compounds in aqueous solutions degradation pathways and biodegradability. *Water Research*. 2004; 38: 3110-318.
46. Yachmenev VG, Blanchard EJ, Lambert AH. Use of ultrasonic energy for intensification of the bio-preparation of greige cotton. *Ultrasonics*. 2004; 42: 87-91.
47. Yavuz Y, Koparal AS, Artık A, Ogütveren UB. Degradation of Cl. Basic Red 29 solution by combined ultrasound and Co<sup>2+</sup>-H<sub>2</sub>O<sub>2</sub> system. *Desalination*. 2009; 249: 828-831.
48. Zar JH. *Biostatistical Analysis*. Prentice-Hall, Englewood Cliffs. 1984.
49. Zhao S, Li J, Wang L, Wang X. Degradation of Rhodamine B and Safranin-T by MO<sub>3</sub>CeO<sub>2</sub> Nanofibers and Air Using a Continuous Mode. *Clean-Soil Air Water* 2010; 38: 268-274.